


 **WiMo**

**MULTIPARAMETER
SONDE**

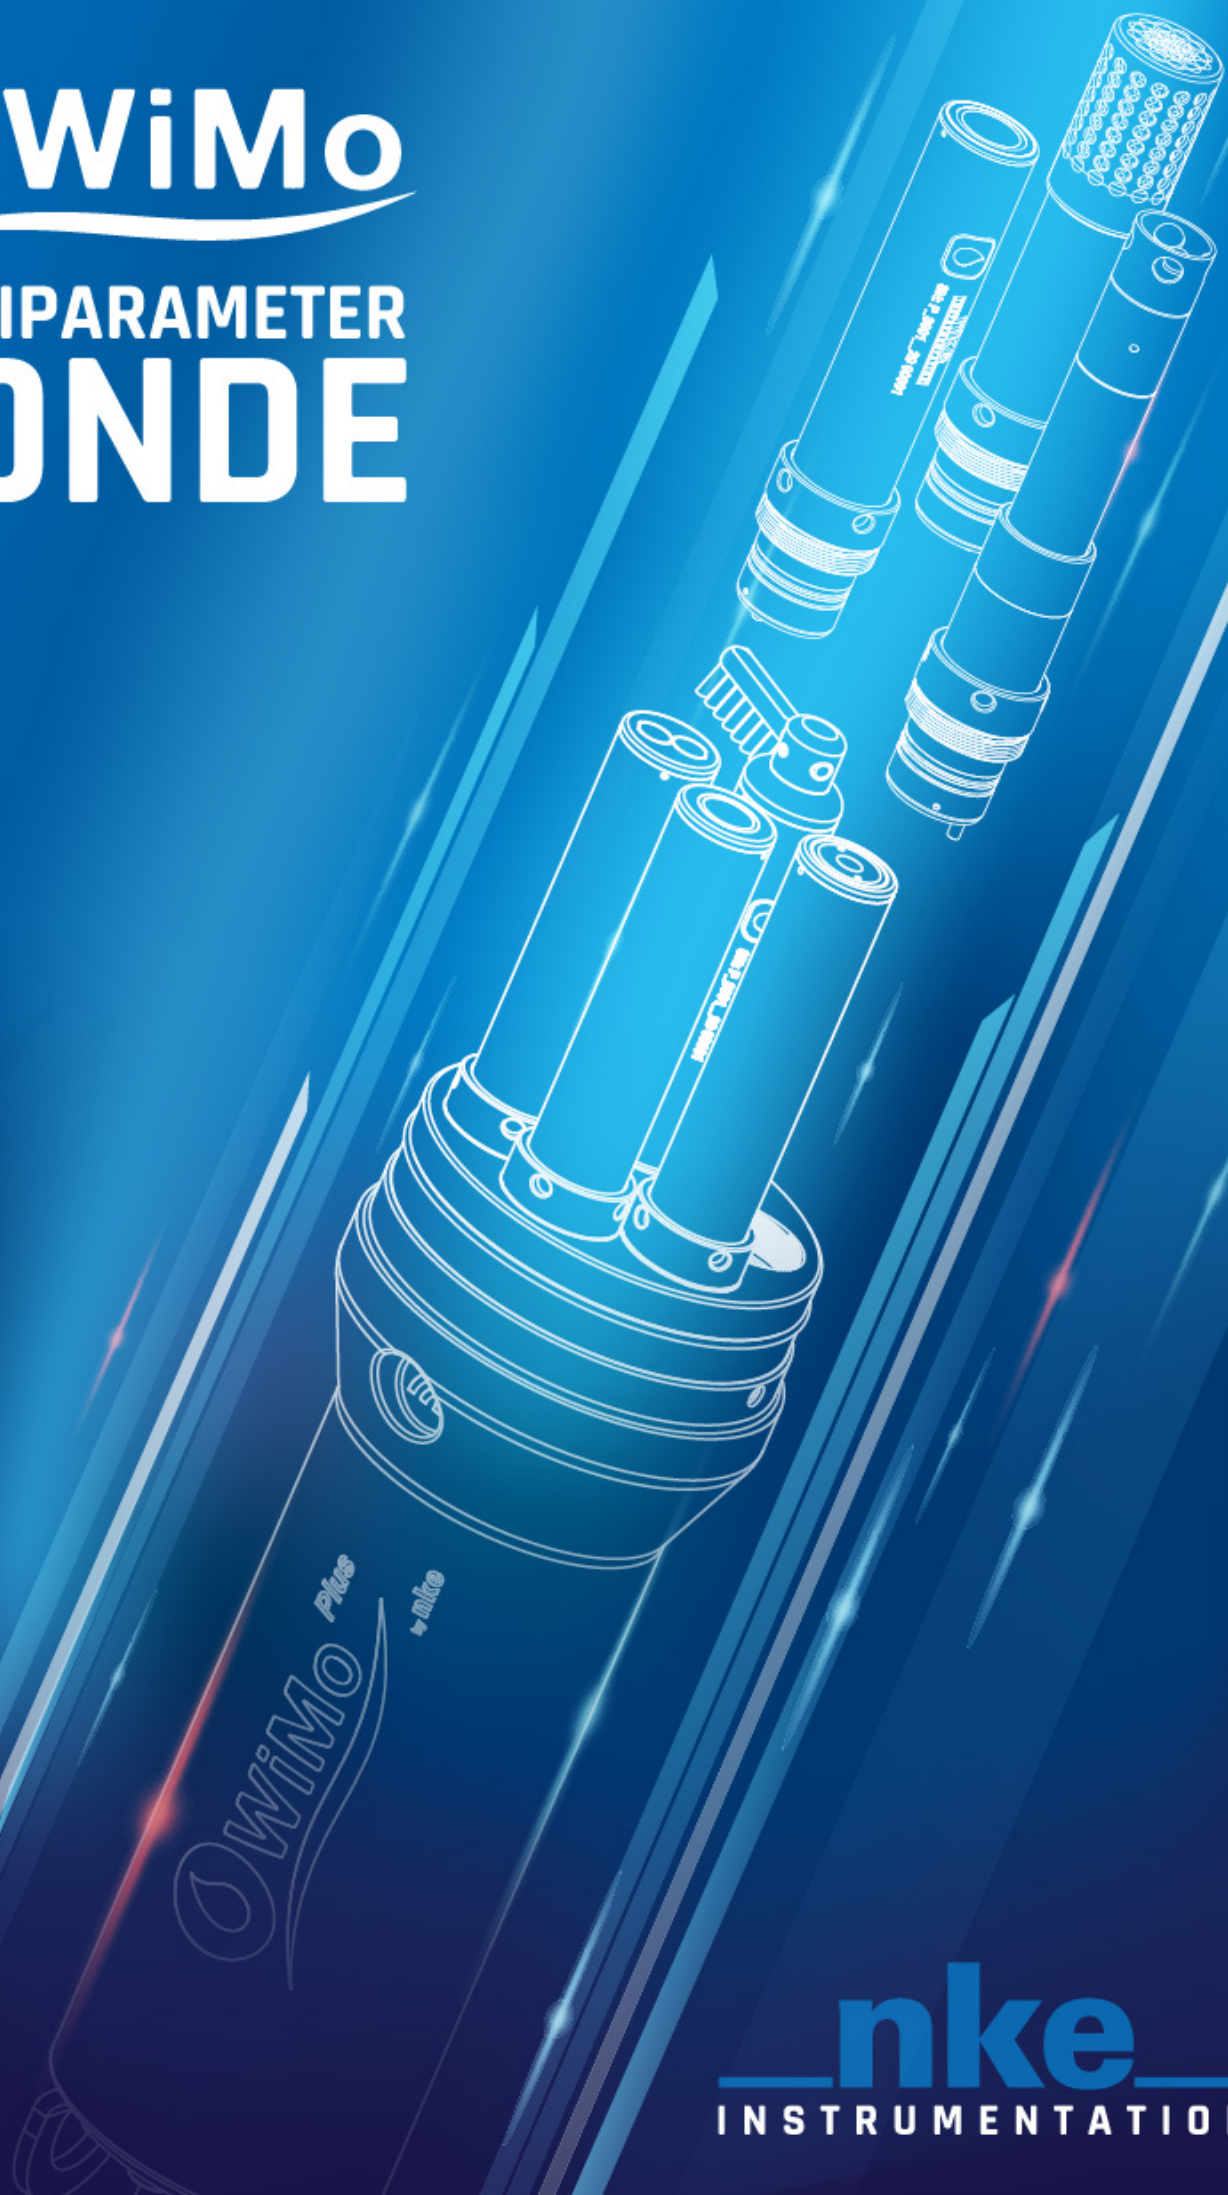

nke
INSTRUMENTATION

WiMo SONDE

WiMo
4 locations



WiMo Plus
7 locations



PLUG-IN SMART SENSORS

Installable at any locations
Easy locking screw and
water sealing system
Waterproof once locked



EFFICIENT BIOFOULING SYSTEM

Sensor protection cover
Smart wiper cleaning
system



AUTOMATIC SENSOR RECOGNITION



MORE THAN 20 PARAMETERS AT A TIME



WIRELESS PROGRAMMING

Intuitive and easy to use
web interface



TEMPERATURE AND PRESSURE SONDE

Without any digital sensors



HIGH INTERNAL STORAGE CAPACITY



POINT TO POINT WIFI WITH SWITCH MAGNET ACTIVATION



DEPTH RATING UP TO 250m



RANGE OF AUTONOMOUS COMMUNICATION MODULES



STANDARD MODBUS

RS232 & RS485
User-selectable



USER REPLACEABLE STANDARDS BATTERIES

Alkaline batteries
or rechargeable Nimh



TRANSMISSION MODULE



The 3G/4G modem allows the WiMo multiparameter probe to transmit its data using deployed 3G/4G interface.

WIMO CALIBRATION TOOL



The USB tool allows to connect a WiMo digital sensor to a computer to calibrate the sensor independently.
Works with the « WiMo Calibration Tool » dedicated software,

SPECIFICATIONS

PHYSICAL FEATURES	MECHANICAL FEATURES	TRANSMISSION	TEMPERATURE
Dimensions WiMo w/sensors 489 mm WiMo Plus w/sensors 499 mm Diameter 85 mm & 110 mm Weight in air 2,65 kg & 3,05 kg	Maximum depth 250 meters Flash memory 16 MB Up to 2 million measures* Battery 6 Alkaline batteries D-Type	WiFi communication Modbus RS232 / RS485 3G / 4G solution No dedicated software required (embedded web interface is compatible with all types of platforms)	Operating temperature -5°C / +50°C Storage temperature -20°C / +70°C

*with ZIP

DIGITAL SMART SENSOR SUITE¹

NATIVE PARAMETERS	RANGE	ACCURACY	RESOLUTION
Temperature	-2 to +35°C	±0.2°C (option)	0.05°C
Pressure	0 to 1 (option)/3/10/25 bar(s)	±0.1%	0.0002 bar
SENSORS	RANGE	ACCURACY	RESOLUTION
Conductivity (C)	0 to 10 mS/cm 0 to 100 mS/cm	5 µS or 0.5% of reading 25 µS or 0.5% of reading	1 µS/cm 1 µS/cm
Temperature	-2 to +35°C -5 to +50°C (in option)	±0.02°C ±0.05°C	0.001°C 0.001°C
Turbidity (Tbd)	0 to 4000 NTU ⁵	0.4 NTU or ±5% of reading	0.01 NTU
Oxygen concentration	0-23 mg/L (max. 0-44mg/L)	±0.1 mg/L	0.01 mg/L
Oxygen saturation	0-250% (max. 0-500%)	±1% of reading	0.1%
Temperature	0°C to +35°C	±0.1°C	0.01°C
Fluorescence (Fluo) Chlorophyll A	0 to 500 ppb ²	Linearity: $r^2 > 0.99$ for Rhodamine WT	0.03 ppb
Fluorescence (Fluo) Phycocyanin	0 to 4500 ppb ²	Linearity: $r^2 > 0.99$ for Rhodamine WT	0.1 ppb
Fluorescence (Fluo) Phycoerythrin	0 to 750 ppb ²	Linearity: $r^2 > 0.99$ for Rhodamine WT	0.1 ppb
CDOM fDOM	0 to 1500 ppb QSE ³	Linearity: $r^2 > 0.99$ QSE	0.1 ppb QSE
Crude oil	0 to 1500 ppb ⁴	Linearity: $r^2 > 0.99$	0.2 ppb
pH⁷	0-14 pH units	±0.1 pH unit	0.01 pH unit
Redox/ORP⁶	-1999 to +1999 mV	±20 mV	0.1 mV
Nitrate⁶⁻⁸	0 to 300 ppm	10% of reading or 2 ppm	0.01 to 1 ppm
Ammonium⁶⁻⁸	0 - 200 ppm	10% of reading or 2 ppm	0.01 to 1 ppm ⁹

Recommended calibration duration of all sensors*: 1 year, except for pH (6 months) and ISE (3 months) when used in freshwater.

*Based on a standard usage

CALCULATED PARAMS	RANGE	ACCURACY	RESOLUTION
Chloride	0 to 18000 mg/L-Cl	±15% of reading or ±5 mg/L-Cl	0.01 mg/L
Depth	0 to 10 (option)/30/100/250 m	0.1% FS	0.01 m
Salinity	0-70 PSU	0.1 PSU or 1% of reading	< 0.001
Sound Velocity	1300-1700 m/s	0.001 m/s	Not specified
Specific Conductivity	0 to 10 mS/cm 0 to 100 mS/cm	5 µS or 0.5% of reading 25 µS or 0.5% of reading	1 µS/cm 1 µS/cm
Total Dissolved Solids	0 to 10,000 mg/L 0 to 100,000 mg/L	<±5%	1 mg/L 10 mg/L

Technical data subject to change.

¹Real smart interchangeable sensors: each sensor is calibrated independently

²Equivalent µg/L

³Quinine sulfate

⁴PTSA

⁵ Calibrated with Formazine (FNU)

⁶ Sensor maximum depth: 15 meters

⁷ Sensor maximum depth: 50 meters

⁸ Only for fresh water

⁹ For high-concentration

EMBEDDED WEB INTERFACE

The operational user-friendly configuration interface is compatible with all types of platforms.



APPLICATION FLEXIBILITY

Sea environment
MONITORING



Fresh water
applications and profiles
RECORDING



INTEGRABLE
on any platforms

inoview bynke



DATA MONITORING DASHBOARD

Real-time visualization



User-friendly platform

Alarm monitoring



Customizable interface

Secure access and data storage



Export customized reports

WiMo SOLUTION



SALES DEPARTMENT

+33 (0)2 97 36 11 81
info.instrumentation@nke.fr



INNOVATION & COMMITMENT
nke is a member of French Fab and committed to the French industry of tomorrow.

